

MeadowBurke

Keyway Splice Box

A Concrete Reinforcement Continuity System



We are one team. We are Leviat.

Leviat is the new name of CRH's construction accessories companies worldwide.

Under the Leviat brand, we have united the expertise, skills and resources of Meadow Burke and its sister companies to create a world leader in fixing, connecting and anchoring technology.

The products you know and trust, including Meadow Burke, will remain an integral part of Leviat's comprehensive brand and product portfolio. As Leviat, we can offer you an extended range of specialist products and services, greater technical expertise, a larger and more agile supply chain and better, faster innovation.

By bringing together CRH's construction accessories family as one global organisation, we are better equipped to meet the needs of our customers, and the demands of construction projects, of any scale, anywhere in the world.

This is an exciting change. Join us on our journey.

Read more about Leviat at Leviat.com







thermomass



3,000 employees

60 locations

25 countries

4 continents

REINFORCING CONTINUITY SYSTEMS

The use of reinforcement continuity strip systems or 'pull-out bar' systems has been widespread in European markets for over 30 years. It is becoming a very common method of ensuring continuity of reinforcement across construction joints in concrete. The system design includes lapping reinforcement to provide a splice and connection.

Meadow Burke has been involved in manufacturing of the Keyway Splice Box since it's original introduction to the US market in 1992. The Keyway Splice Box system is a safe and cost effective reinforcement method that also provides time and labor savings in many applications. The system is custom made to meet each engineer's reinforcement detail, eliminating unnecessary labor on site.

The Keyway Splice Box system consists of unique, high yield reinforcing steel, housed in a galvanized steel carrier unit. The unit ends are sealed to prevent leakage. The reinforcement used is available in #4, #5 or #6 and is equal to ASTM A615 Grade 60 and meets ACI 318-11. The system is assembled in a controlled factory environment in order to provide the quality demanded from a harsh construction environment.

The units are used on site by nailing to the formwork or wire tied to the main reinforcement, prior to a concrete pour. After concrete is poured and the formwork is removed the lid is easily removed to expose ready to use lap splice bars.

The bars are bent out of the case to provide an easy lap splice to the main reinforcing steel and subsequent concrete pours.


The case design offers an efficient key and requires no further joint preparation. The dovetail shaped casing ensures the product remains embedded in the structure when removing the formwork. The case remains in the joint and is filled with concrete on the subsequent concrete pour.

APPLICATIONS:

Keyway Splice Box systems may be used in most concrete construction joints. The systems are being utilized in high rise residential, hotels, office towers, hospitals, prisons, solar energy, wind towers, water treatment, concrete pavement, bridge construction, and many other types of projects. Typical joint applications include:

- Floor Slabs
- Stairwells
- Corbels
- Jump Forms
- Precast Elements
- Bridge Decks

- Walls
- Beams
- · Diaphragm Walls
- Brick Support Ledges
- · Tilt-up Panels
- Concrete Paving / Slab on Grade

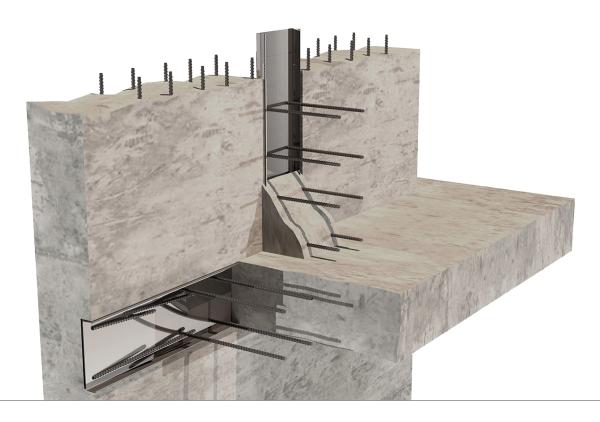



THE BENEFITS OF OUR SOLUTION

Use of the Keyway Splice Box system offers many benefits over conventional joint construction. This contributes to the acceleration of the construction process. Some of the advantages of using the Keyway Splice Box Systems:

SPEED

Keyway Splice Box units are easy to use and quickly nailed to formwork or tied to the main reinforcement.

Eliminates the need to drill formwork for rebar.

Formwork designs can be simplified and complicated construction joint designs reduced.

Climbing formwork systems can be easily used.

Easy to use, the system requires little onsite training in order to carry out installation.

SAFETY

The Reinforcing Bars are housed in a steel case until ready for use.

The Keyway Splice Box eliminates protruding bars that potentially cause injury and improves available work space.

QUALITY

Prepositioned bars ensure precise alignment, assures full load transfer, increases joint strength and limits the concrete shrinkage between concrete placements.

A perforated casing allows free airflow, assisting removal of entrapped air, especially where high pour heights are being achieved.

Fabricated in a controlled manufacturing environment to ensure the highest quality and dimensional integrity.

The reinforcement bars remain protected and clean from damageuntil required for use.

COST

Formwork systems do not need to be drilled, damaged or repaired when using the Keyway Splice Box system, thus improving the life of cycle formwork.

The Keyway Splice Box is extremely easy to use and can be installed without specialized training.

Simplifies formwork designs and allows larger concrete pour.

Eases rebar and formwork placement, improving your productivity.

SYSTEM COMPONENTS

Keyway Splice Boxes are available with either a single or double row of dowel bars, straight dowels, hooks, stirrups and lap splices. They are custom fabricated to meet exact specifications and job design requirements.

STEEL CASE

The Keyway Splice Box cases are manufactured from galvanized mild steel rolled to precise dimensions. The cases are perforated on the larger face to provide an excellent bond to the first concrete pour and provide an efficient key for the subsequent pour. A wide range of case sizes are available to suit the rebar detail requirement.

STEEL LID

The Keyway Splice Box system is fitted with a rigid metal lid that allows easy removal once required.

END CAP SEAL

Keyway Splice Box cases are fitted with two easily removed polystyrene end caps that prohibit concrete from entering the casing. End cap seals are suitable for recycling once removed.

Keyway Splice Box systems feature the exclusive use of the dovetail steel keyway. This keyway produces a locked joint which results in increased full out strength and a much greater resistance to shear at the joint.


COMMON BOX DESIGN TYPES


Box designs have been simplified to meet a wide array of reinforcement variations. Common casing types are:


- 60S/100S
- 160D
- 160DD


Box Type	Standard Width	Standard Depth	Standard Length	Minimum Length	Maximum Length
60S	2.5"	1.5"	48"	24"	96"
100S	3.5"	1.5"	48"	24"	96"
160D	6"	1.5"	48"	24"	96"
160DD	6"	1.5"	48"	24"	96"

Each project has its own unique requirements. The dimensions provided are easily adjusted to suit specific needs.

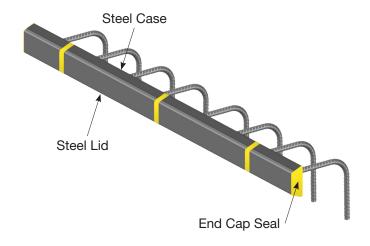

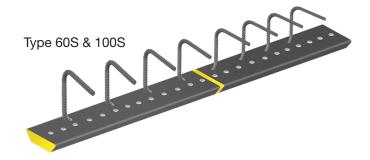

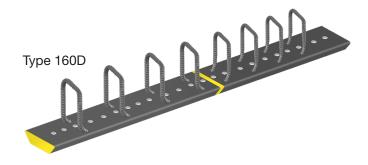

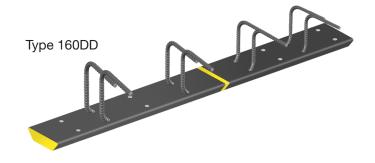

TECHNICAL PRODUCT DATA

The heart of the Keyway Splice Box system is the reinforcing bar. The unique reinforcement is manufactured through a treatment of reinforcing steel bars in order to produce high yield strength material. This unique treatment is quenched and tempered processing.

This bar treatment is produced through a rapid cooling operation and a severe water quench, which takes place directly after the last finishing stand. Because the bar is quenched and tempered for a controlled period of time, a lower chemical analysis than that used to produce conventional bar is needed in order to meet the physical property requirements of the ASTM A615/A615M specification. In many cases the material meets the carbon and carbon equivalent limits of ASTM A706/A706M and is therefore a readily weldable material.

The bars possess higher than typical elongation numbers along with the higher yield strength. Bendability and rebendability is excellent. Breakage during fabrication is very minimal.

The bars are produced and certified to ASTM A615/A706 dual spec.


Grade 60 Reinforcing Steel Properties							
Bar Diameter	A615	A706	A615/A706 Q&T				
Yield strength, minimum psi	60,000	60,000	60,000				
Tensile strength, minimum psi	90,000	80,000	90,000				
Elongation in 8" minimum %	9%	14%	14%				



HOW TO ORDER

Keyway Splice Box Systems are intended to simplify your project. Ordering the Keyway Splice Box is as simple as determining the reinforcing detail for a specific application.

After determining a potential area for a construction joint, six simple steps are needed to quickly identify crucial data.

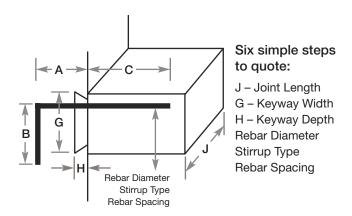

The Joint Length provides an estimate of the number of boxes needed for this application. It will also provide a guide for the length of the box itself.

The Keyway Width will allow the Keyway Box to match your project's design requirements. It will also allow us an opportunity to ensure proper clearance for reinforcing steel inside the case prior to straightening.


The Keyway Depth will match the keyway casing to specific project requirements.


Rebar Diameter: Specifying the rebar diameter is required. The Keyway Splice Box is available in #4, #5, or #6.


Stirrup Type: While rebar configurations are virtually endless, we have established standard configurations.


Rebar Spacing through the Meadow Burke Keyway Splice Box quotation form on the website at meadowburke.com/keywaysplice- box Meadow Burke's experienced staff will utilize the information from the form to recommend the best solution for your specific application.

TYPICAL REBAR CONDITIONS













TYPE U: Reverse U-shaped Bar









Bar	D (inch)	180° I	90° Hooks	
Size		A or G	J	A or G
#4	3"	6"	4"	8"
#5	3¾"	7"	5"	10"
#6	4½"	8"	6"	12"

STANDARD HOOK DETAILS


- In accordance with ACI 318-11
- All Grades
- D = Inside Finished Bend Radius

INSTALLATION

The Keyway is easily installed in the field by nailing it directly to the form face. This will ensure linearity and proper rebar spacing, which reduces installation and job site labor costs.








Attach the Keyway Box by nailing through the casing to the formwork or securely tie the projecting reinforcing bars to existing reinforcement. The Box should be firmly secured and tight against the formwork to avoid displacement during concrete placement.

Once the formwork is removed, the steel cover will be exposed. Remove the steel cover to expose the pre-bent reinforcing steel.


Straighten the bars using a hickey bar (cheater bar) that is slightly larger than the rebar being straightened. The bars should be straightened only once according to the procedure highlighted below. Care should be taken to avoid damage to adjacent concrete. See 'Rebar Straightening' below for additional information.

REBAR STRAIGHTENING PROCEDURE

- 1. After the disposable cover is removed, the bars are to be easily pulled out by hand at a maximum of 20° from the Keyway Box.
- 2. A hickey bar (cheater bar) of a diameter just large enough to slide over the pre-bent bar is to be used to finish the procedure.
- Slide the hickey bar as far up the bar as possible and rebend the bar approximately another 25°-30°. Repeat this procedure 2 - 3 times more until the bar is exactly straight. DO NOT REBEND the pre-bent bars in one motion.
- 4. Do not heat the bars for rebending. We also do not recommend rebending the bars in the field more than once.



Notes

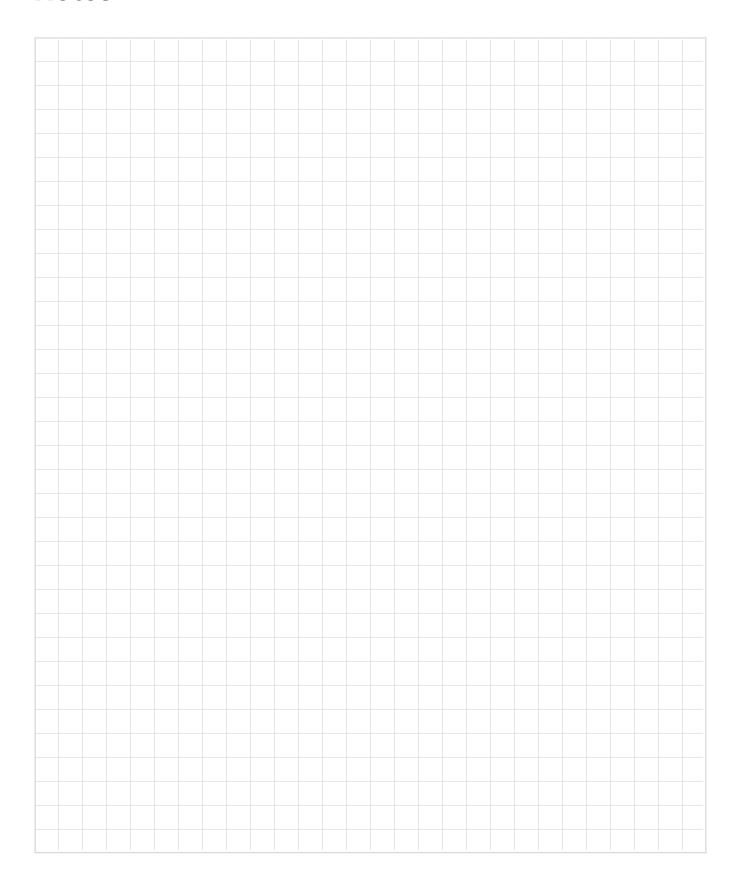

North American Locations

California

3611 E La Palma Ave Anaheim CA 92806 (800) 804-6565

Florida Corporate 6467 S Falkenburg Road Riverview FL 33578 (800) 282-7213

Georgia

3080 N Lanier Parkway Decatur GA 30034 (800) 241-5662

Iowa

1000 Technology Drive Boone IA 50036 (800) 232-1748

New Jersey

526 US Route 46 Teterboro NJ 07608 (800) 207-7778

Oregon

155 SE Hazel Dell Way Canby OR 97013 (888) 232-9991

Pennsylvania

565 Oak Ridge Road Hazle Township PA 18202 (800) 550-0060

Texas

7000 Will Rogers Blvd Fort Worth TX 76140 (800) 993-9641

Texas

8521 FM 1976 Converse TX 78109 (800) 323-6896

Contact Information

Customer Service

(877) 518-7665

Email

info@leviat.us

Engineering Support

(813) 212-5866

Web

www.leviat.com

Leviat.com

 $For information on certified management systems and standards see www.meadowburke.com \mid www.halfen.com \mid www.thermomass.com$

Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

