


Double Tee Anchor

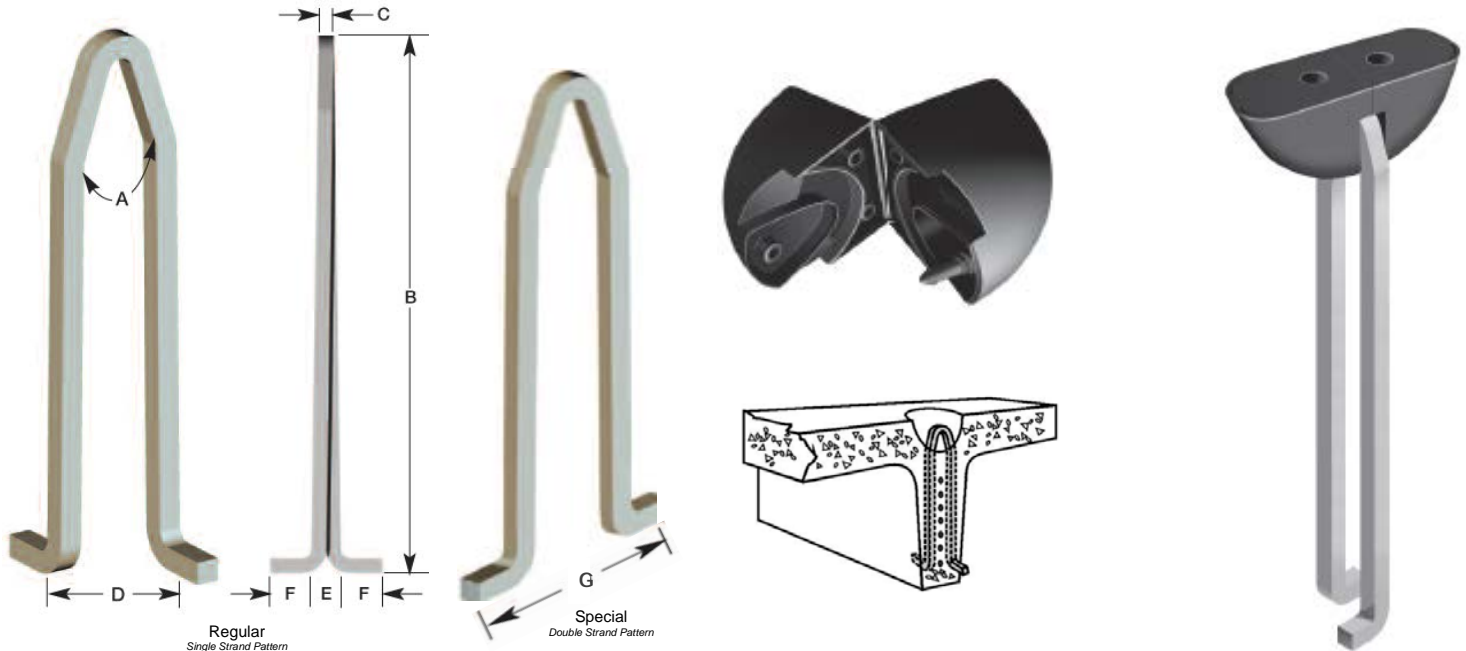

Item Number – Anchor Only	Item Number – Anchor w/ Attached Void Former	Clutch ID	A	B	C	D	E	F	G	Allowable Tension Load 4:1 SF (lbs)	Ultimate Mechanical Load Tension (lbs)	Anchor Weight (lbs)
MB45SL3011	MB45SL3011V	10T	35°	22-3/16"	3/4"	4"	1-1/4"	2"	N/A	20,000	80,000	7.50
MB45SL3011-22-35	MB45SL30112235V	10T	35°	22-3/16"	3/4"	3-1/2"	1-1/4"	2"	N/A	18,750	80,000	7.50
MB45SL3011SP	MB45SL3011SPV	10T	35°	22-3/16"	3/4"	N/A	N/A	N/A	7-3/4"	20,000	80,000	7.45

1. Allowable Tension Load is based on 5,500 PSI concrete strength and 150 pcf normal weight concrete
2. Minimum concrete cover on side of foot is 0.625" and 1" underneath foot.
3. Available in Plain Finish only
4. Custom lengths available on special order

What is the Double Tee Anchor?

The Double Tee Anchor – 10 Ton is simple in design, but very effective in lifting and handling precast Double Tees. The recessed anchor allows quick and easy finishing; no lifting strands to cut or burn off, only a simple patch of the recess. The 10 Ton anchor can be purchased separately or with the void former already attached.

Call to learn more about Double Tee Anchor
877.518.7665, or visit MeadowBurke.com