


RL-39 Cable Ring Clutch

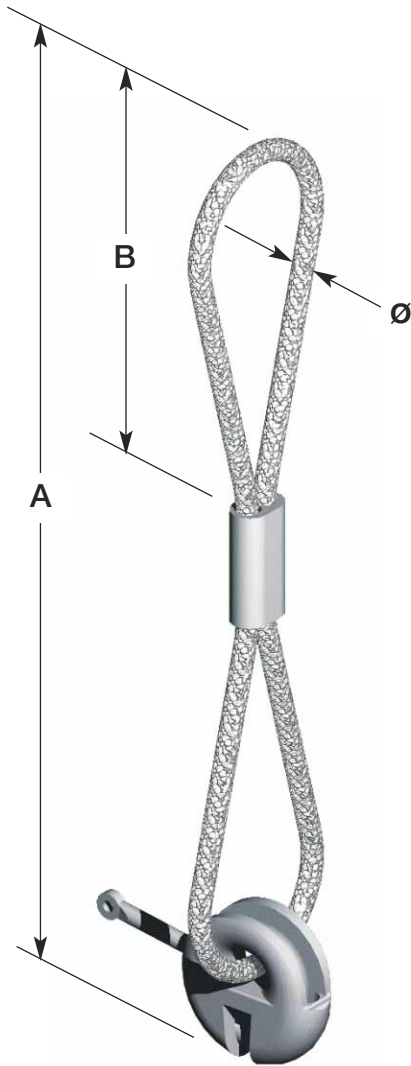

22-Ton

The RL-39 Ring Clutch – Cable is identical in use to the standard ring clutch, but is fabricated with a wire cable bail for more versatility. It is often an effective answer for difficult lifting and rotation challenges.

RL-39 CABLE RING CLUTCH DATA

Item	Ring Clutch System	Clutch ID ²	Item Number	A	B	Cable Diameter Ø	Weight per Piece	Clutch Capacity (ton)
RL-39 ¹	22T	26T	MB79170CB	62"	N/A	32 mm	67.0	22

1 Available on special order or limited quantity on hand. Special orders take 8 to 10 weeks.

2 Clutch capacity is rated at a 5:1 safety factor.