


CR-4 Coil Rod – Hi Strength

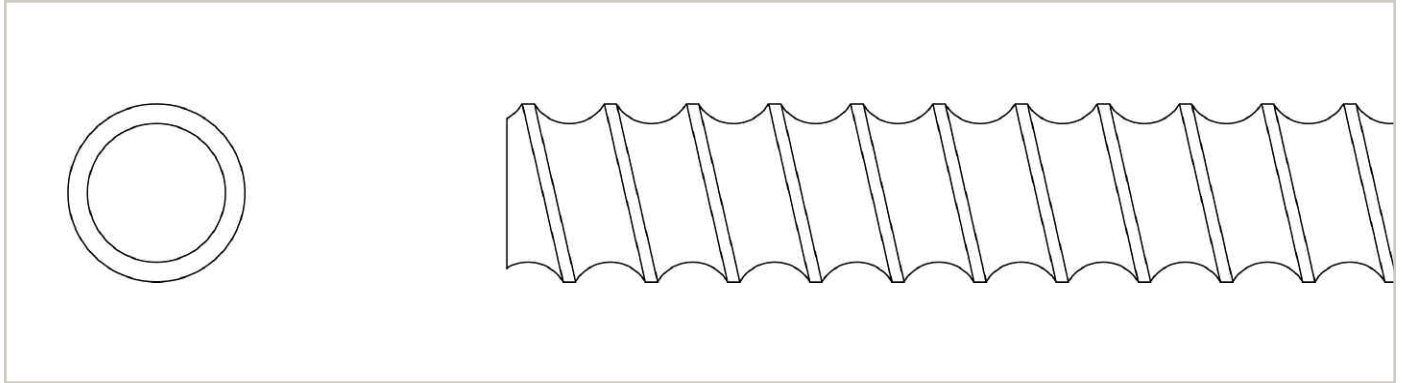

CR-3 & CR-4 COIL ROD DATA		
Coil Rod Diameter	CR-3 Safe Work Loads (lbs)	CR-4 Safe Work Load (lbs)
1/2"	---	9,000
3/4"	12,000	18,000
1"	24,000	38,000
1-1/4"	36,000	56,000
1-1/2"	54,000	68,000

Safe working load is based on an approximate 2:1 safety factor.

The CR-3 and CR-4 Coil Rods are manufactured from quality high-grade steel with a full-length coil thread. It is available in 1/2" to 1-1/2" diameters cut to length or in 10' or 12' lengths for field cutting. CR-3 Standard Coil Rod comes in 10' lengths and CR-4 Hi-Strength Coil Rod is furnished in 12' lengths. Longer lengths are available on special order. Coil Rod can be used with numerous other coil-threaded products to fashion an adjustable tie, an emergency tie, embedded as an adjustable anchorage, etc.

NOTE: 1/2" and 5/8" dia. is available only as CR-4 Hi-Strength Coil Rod. Coil Rod requires two Standard Coil Nuts or one Heavy Coil Nut to develop the safe working loads shown. Minimum coil penetration applies; see coil penetration warning above.

