

Super Lynk



Super Lynk is a panel-to-foundation connection system that eliminates the need for epoxy or grouted anchors and field welds

Heightened performance and reduced visibility

Super Lynk is a fast, strong and discrete way to permanently connect concrete panels to footings. It requires only a single bolt to make the connection and can easily be concealed within the normal grout line process.

Features

- **Saves time and money:** The single bolt connection is simple and quick to install while eliminating the need for epoxy, grout and in-field welding, saving you time and money.
- **Improved performance:** The engineered, patented connection system has been developed by Meadow Burke's team of Tilt-Up experts to meet ACI 318-14 16.2.4.3 (b).
- **Improved aesthetics:** With a profile less than 2½", the Super Lynk is discrete relative to alternative connection systems and can easily be concealed by normal backfill and landscaping.

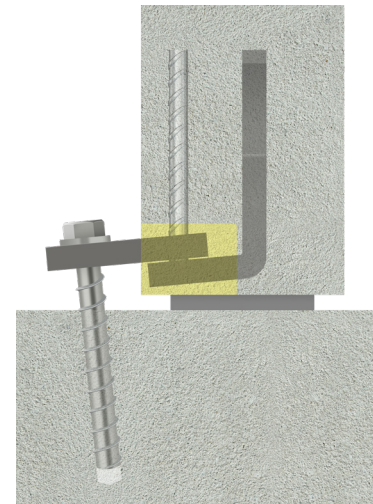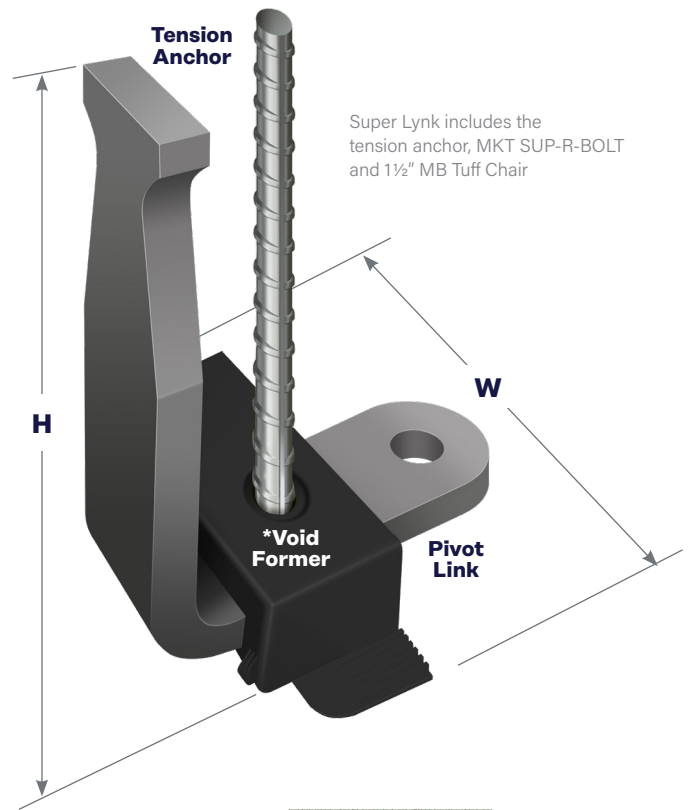


Super Lynk Data					
Item Number	Tension Load	Width	Height	Min. Panel Thickness	Weight per Unit
MBSLYNK	10,000 lbs	8"	10"	6"	10½ lbs

1. Ultimate Tension Load is based on 2,500 psi concrete

2. Super Lynk shipment includes one 1½" tall MB Tuff Chair and one ¾" x 10" MKT SUP-R-BOLT

US PATENT 10,577,789


Super Lynk Installation

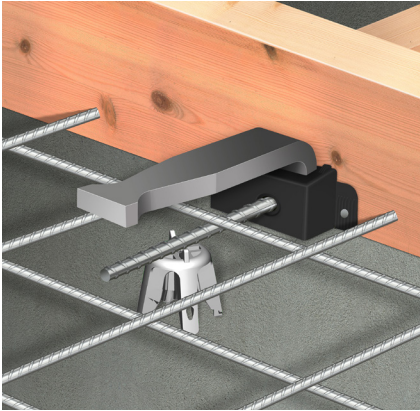

STEP 1 Attach to the Form


Attach the anchor to the bottom corner of the concrete panel form with the use of screws or nails through the side tabs of the void and into the wood form.

Use a plastic 1½" MB Tuff Chair to support the weight of the anchor and hold embossed side of the void flat to the bottom of the panel and tight to the form.

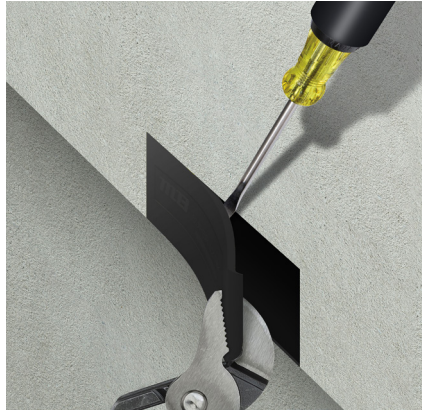


STEP 2 Remove Void Cover

Following panel erection, remove the void cover, revealing the Pivot Link.

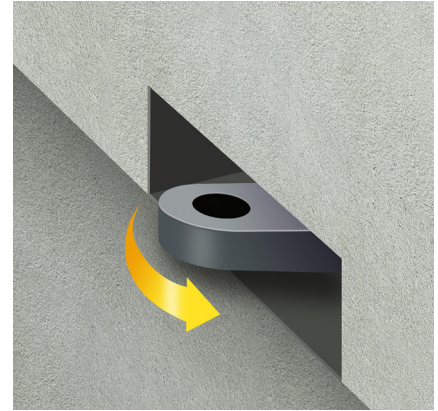

STEP 3 Access Pivot Link

Rotate the Pivot Link until it protrudes outside of the panel face.

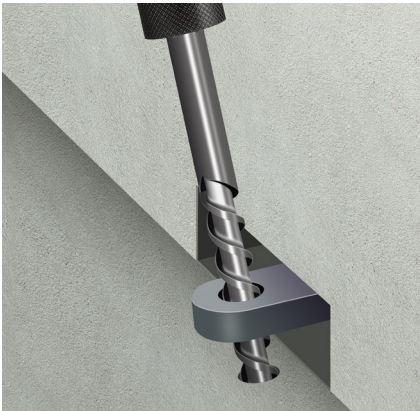

STEP 4 Drill the Anchor Hole

Mark the location for the drill hole beneath the eye of the Pivot Link.

Using the proper drill bit size, drill a ¾" hole into the base material to the required depth of 9". The tolerances of the drill bit used should meet the requirements of ANSI standard B212.15.

Remove dust and debris from hole during drilling (e.g. dust extractor, hollow bit) or following drilling (e.g. suction, forced air) to extract loose particles created during drilling.



STEP 5 Anchor into the Foundation

Using a maximum 450 ft/lb torque wrench and 1½" hex socket/driver, mount the Screw Anchor head into the socket.

Drive the MKT SUP-R-BOLT until the head of the anchor comes in contact with the Lynk. The screw anchor washer head must be snug after installation. Do not spin the hex socket off the anchor head when disengaging.



STEP 6 Panel is Permanently Connected to the Foundation

The normal grouting process around the bottom of the panel should be followed to include the Super Lynk and bolt head. This grout encasement will fill any gap between the Super Lynk and footing to provide a uniform finish, and avoid any potential for lateral movement.

MKT SUP-R-BOLT is a product of MKT Fastening, LLC