

Leviat


A CRH COMPANY



One Style
of Face Lift
Anchor, Eight
Heights



One Style, and
one Length of
Edge Lift Anchor

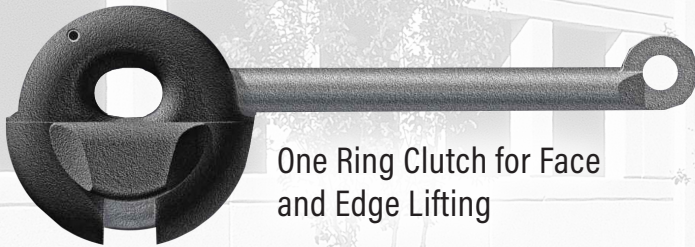

One Ring Clutch for Face
and Edge Lifting



One Void
Former and
Shear Bar for
All Anchors

ELIMINATES 4, 6 AND 8-TON LIFTING ANCHORS

MB MeadowBurke®

The Burke Lift

The Complete 10-Ton Lifting System



We are one team.

We are Leviat.

Leviat is the new name of CRH's construction accessories companies worldwide.


Under the Leviat brand, we have united the expertise, skills and resources of Meadow Burke and its sister companies to create a world leader in fixing, connecting and anchoring technology.

The products you know and trust, including Meadow Burke, will remain an integral part of Leviat's comprehensive brand and product portfolio. As Leviat, we can offer you an extended range of specialist products and services, greater technical expertise, a larger and more agile supply chain and better, faster innovation.

By bringing together CRH's construction accessories family as one global organisation, we are better equipped to meet the needs of our customers, and the demands of construction projects, of any scale, anywhere in the world.

This is an exciting change. Join us on our journey.

Read more about Leviat at [Leviat.com](https://www.leviat.com)

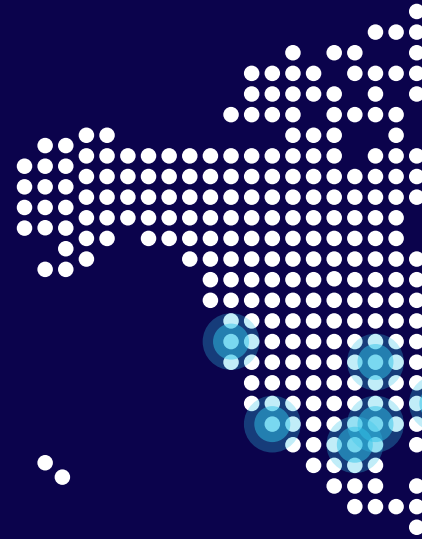

Our product brands include:

MB MeadowBurke®

H
HALFEN

thermomass®



3,000

employees

60

locations

25

countries

4

continents

Imagine. Model. Make.

Leviat.com

One Ring Clutch, One Void Former, One Anchor

After more than three years of development and testing by Burke Engineering, the Burke Lift system is changing face and edge lifting. This unique overall design may just be the most innovative lifting product in more than 30 years. The cutting edge system greatly simplifies engineering, inventory requirements, lifting, and it completely eliminates clutch changeover and the spalling of surrounding concrete.

The Lifting Innovation

- *One ring clutch*
- *One void former for all anchors*
- *One edge lift erection anchor*
- *One style of face lift anchor, available in eight heights*

Our patented clutch redirects the shear force distribution opposite of existing lifting systems.



Among the Burke Lift's features is a one-clutch system, which allows for the elimination of switching between 4/5-ton and 8/10-ton clutches. The patent pending clutch design forces the clutch to bear into the Burke Lift Anchor rather than the concrete. The Burke Lift Clutch is rated at a SWL of 10T including a 5:1 safety factor. It is equipped with one style face lift anchor in eight heights for panel thickness from 5" to 12" allowing for a shear safe working load in thinner panels. Burke Lift functions in thin panels of 5" for face lift anchors as well as edge lift anchors.

* Burke Lift Clutch is rated at a SWL of 10-tons with a 5:1 safety factor.

The Burke Lift Advantage


- Burke Lift simplifies traditional 4, 5, 8 and 10-ton applications. It also provides greater capacity than the 6-ton forged anchor
- The system is designed for face and edge lifts, and maintains a 10-ton mechanical strength in ALL applications
- The one clutch system eliminates the need to switch between 4/5 ton and 8/10 clutches
- The Burke Lift clutch bears into the anchor rather than the concrete on edge lifting
- Face lift anchors accommodate panel thickness of 5" to 12" allowing for a shear safe working load in thinner panels
- Eliminates the need for additional anchor reinforcement
- *Manufactured to Burke quality standards. Each clutch is traceable by serial number, and each anchor is traceable by batch code.*

EDGE LIFT ANCHORS BURKE LIFT VS RAPID LIFT								
Anchor Description	Burke Lift 10-Ton Edge Lift Anchor w/Shear Bar	Rapid Lift 4-Ton Tech Erec w/SP	Burke Lift 10-Ton Edge Lift Anchor	Rapid Lift 4-Ton Tech Erec w/SP	Burke Lift 10-Ton Edge Lift Anchor	Rapid Lift 8-Ton Tech Erec w/SP	Burke Lift 10-Ton Edge Lift Anchor w/SB	Rapid Lift 4-Ton Tech Erec w/SP
Wall Thickness	5"	5"	6"	6"	8"	8"	10"	10"
Shear Bar Height	3.5"	plate	3.5"	plate	3.5"	plate	6.5"	plate
Allowable Shear 4:1 S.F.	2,930 lbs	2,660 lbs	3,120 lbs	2,860 lbs	4,470 lbs	4,010 lbs	5,000 lbs	4,280 lbs
Allowable Edge Tension 4:1 S.F.	6,810 lbs	4,730 lbs*	9,490 lbs	5,170 lbs*	14,820 lbs	7,690 lbs*	20,000 lbs	9,580 lbs
Minimum Corner Distance	22"	22"	22"	12"	22"	18"	22"	18"
Minimum Spacing	44"	24"	44"	24"	44"	36"	44"	36"


Table is based on dead load only, 150 PCF and a standard concrete compressive strength of 3,500 psi.
* Loads shown are without tension bar.

THE EDGE LIFT ADVANTAGE

One Edge Lift Anchor
for Panels 5" + Thickness

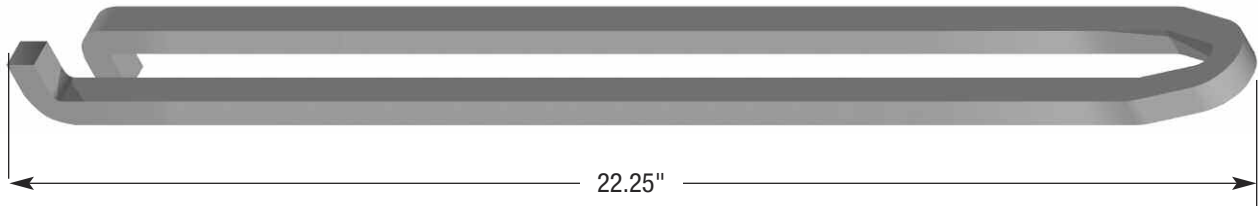

The Burke Lift System Eliminates the Anchors Below

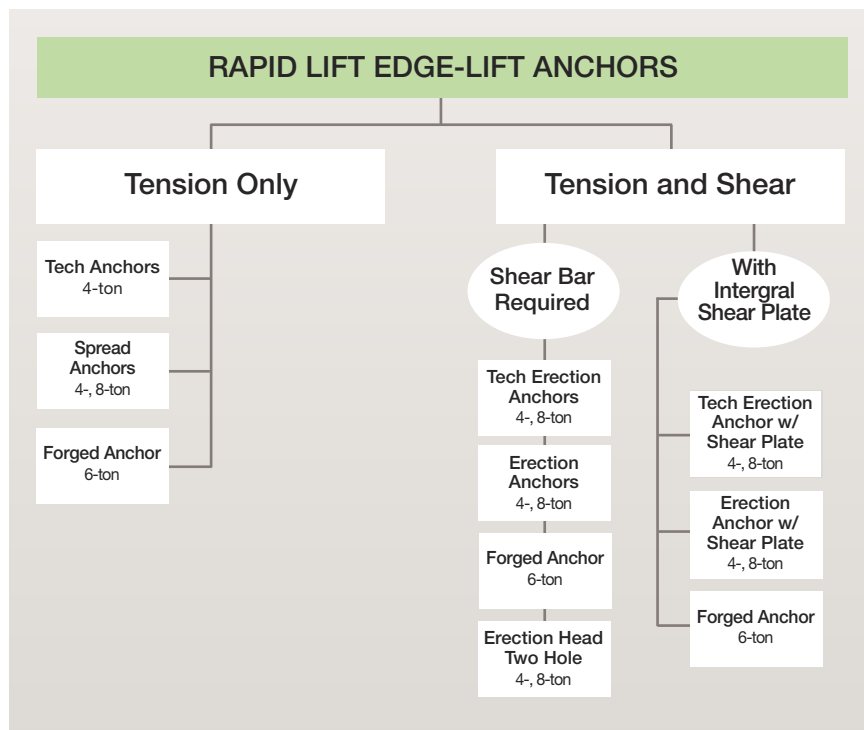


THE FACE LIFT ADVANTAGE

**One Anchor,
Eight Heights**



Item Number	Panel Thickness	Anchor Height (A)	Burke Lift Face Lift Allowable Tension Load 4:1 Safety Factor (lbs)	Rapid Lift Face Lift Allowable Tension Load 4:1 Safety Factor (lbs)	Overall Width (B)	Material Thickness (C)
MB79U40	5"	4"	4,600	2,670 – 5,500	3.89"	0.75"
MB79U50	6"	5"	6,000	3,590 – 8,000	4.45"	0.75"
MB79U60	7"	6"	8,000	6,350	5.01"	0.75"
MB79U70	8"	7"	9,250	10,000	5.57"	0.75"
MB79U80	9"	8"	11,250	N/A	6.13"	0.75"
MB79U90	10"	9"	13,200	N/A	6.69"	0.75"
MB79U100	11"	10"	14,500	N/A	7.25"	0.75"
MB79U110	12"	11"	16,000	12,000	7.81"	0.75"

Table is based on dead load only, 150 PCF and a standard concrete compressive strength of 3,500 psi.

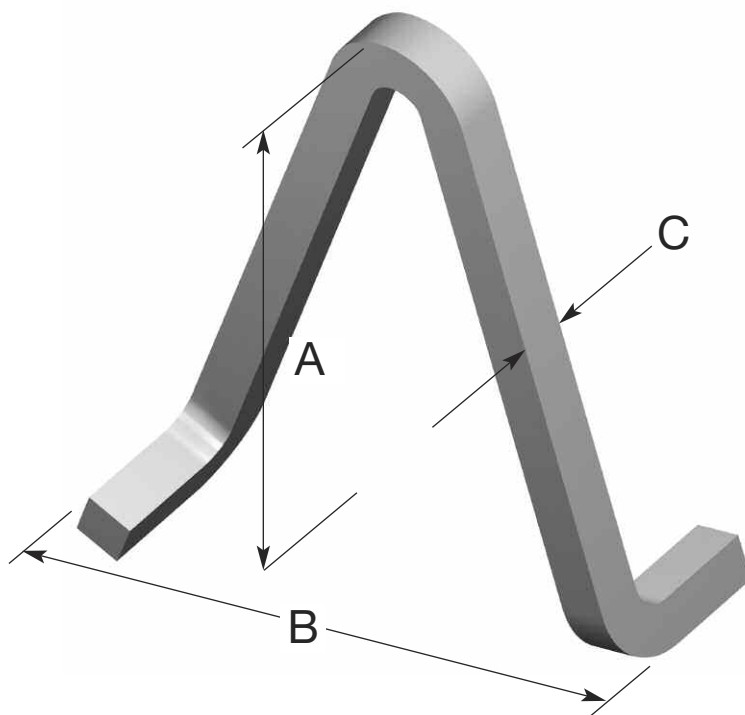

Each clutch is traceable by serial number. Each anchor is traceable by batch code.



One Ring Clutch for Face and Edge Lifting

- Utilizes a replaceable cable bale for lifting
- Long wearing – Burke Dependability
- Patent pending design
- 100% inspected
- Each clutch is traceable by serial number



One Void Former for All Anchors

- Easy snap together design
- Uses standard holding plate
- Magnetic holding plate available



One Shear Bar

- 3/8" round steel bar
- Plain or galvanized
- One standard length
- 100% inspected
- Each anchor is traceable by batch code



One Edge Lift Anchor

- 3/4" square steel bar
- Plain or galvanized
- One standard length
- 100% inspected
- Each anchor is traceable by batch code



One Style of Face Lift Anchor, Eight Heights

- 3/4" square steel bar
- Plain or galvanized
- Available in 1/2" increments upon request
- 100% inspected
- Each anchor is traceable by batch code

North American Locations

California

3611 E La Palma Ave
Anaheim CA 92806
(800) 804-6565

Iowa

1000 Technology Drive
Boone IA 50036
(800) 232-1748

Pennsylvania

565 Oak Ridge Road
Hazle Township PA 18202
(800) 550-0060

Florida Corporate
6467 S Falkenburg Road
Riverview FL 33578
(800) 282-7213

New Jersey
526 US Route 46
Teterboro NJ 07608
(800) 207-7778

Texas
7000 Will Rogers Blvd
Fort Worth TX 76140
(800) 993-9641

Georgia
3080 N Lanier Parkway
Decatur GA 30034
(800) 241-5662

Oregon
155 SE Hazel Dell Way
Canby OR 97013
(888) 232-9991

Texas
8521 FM 1976
Converse TX 78109
(800) 323-6896

Contact Information

Customer Service

(877) 518-7665

Email

info@leviat.us

Engineering Support

(813) 212-5866

Web

www.leviat.com

Leviat.com

For information on certified management systems and standards see www.meadowburke.com | www.halfen.com | www.thermomass.com

Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.



01051LV-B001-2110FC

Imagine. Model. Make.

Leviat.com