


Leviat
A CRH COMPANY

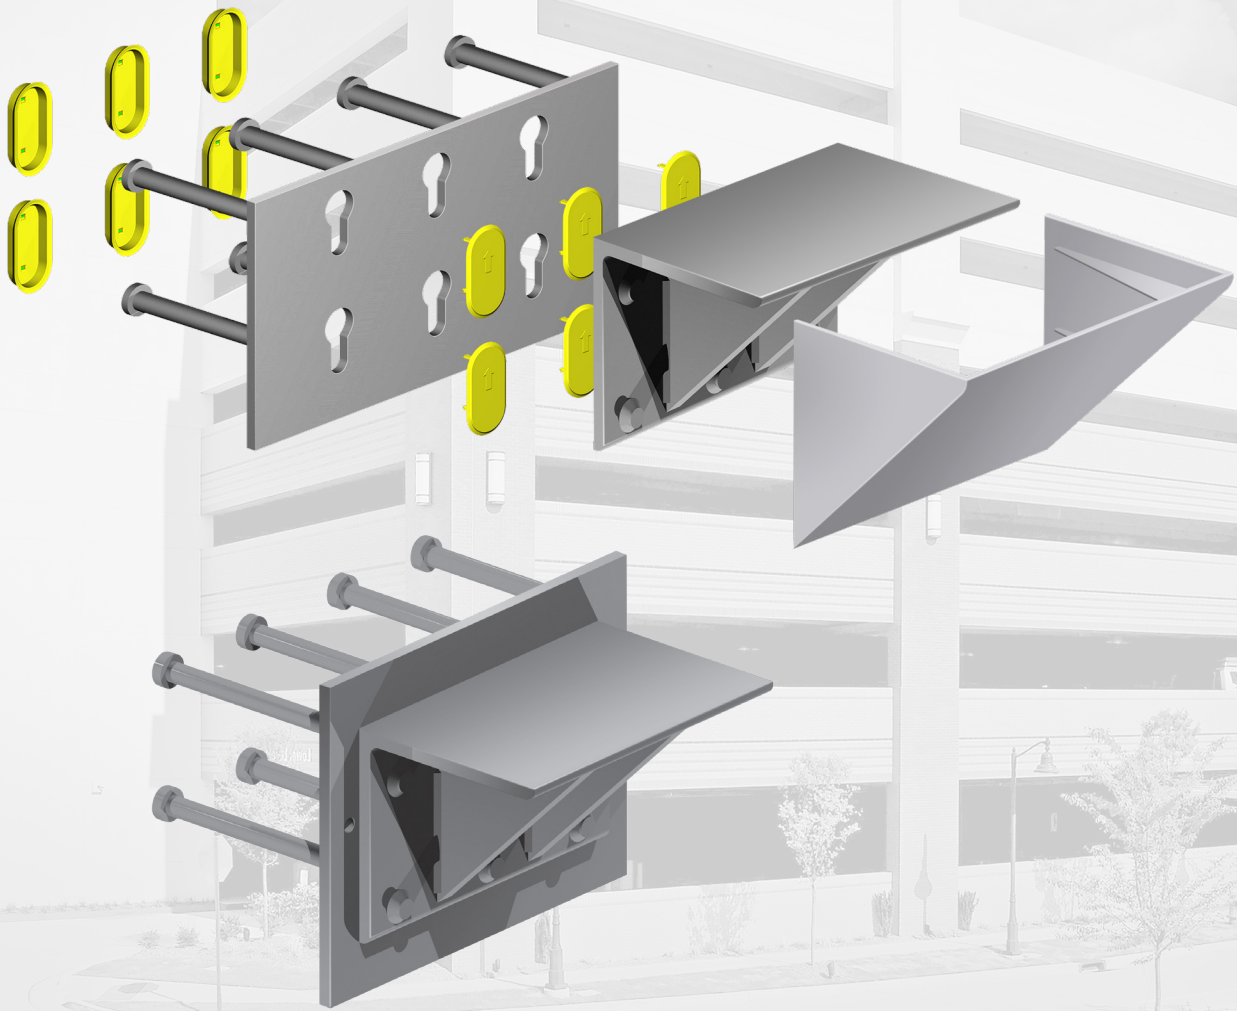

MB MeadowBurke®

The Rapid-Lok® System

Generation II



We are one team.

We are Leviat.

Leviat is the new name of CRH's construction accessories companies worldwide.

Under the Leviat brand, we have united the expertise, skills and resources of Meadow Burke and its sister companies to create a world leader in fixing, connecting and anchoring technology.

The products you know and trust, including Meadow Burke, will remain an integral part of Leviat's comprehensive brand and product portfolio. As Leviat, we can offer you an extended range of specialist products and services, greater technical expertise, a larger and more agile supply chain and better, faster innovation.

By bringing together CRH's construction accessories family as one global organisation, we are better equipped to meet the needs of our customers, and the demands of construction projects, of any scale, anywhere in the world.

This is an exciting change. Join us on our journey.

Read more about Leviat at Leviat.com



Our product brands include:

MB MeadowBurke®

H
HALFEN

thermomass®



3,000

employees

60

locations

25

countries


4

continents

Imagine. Model. Make.

Leviat.com

A Better Solution

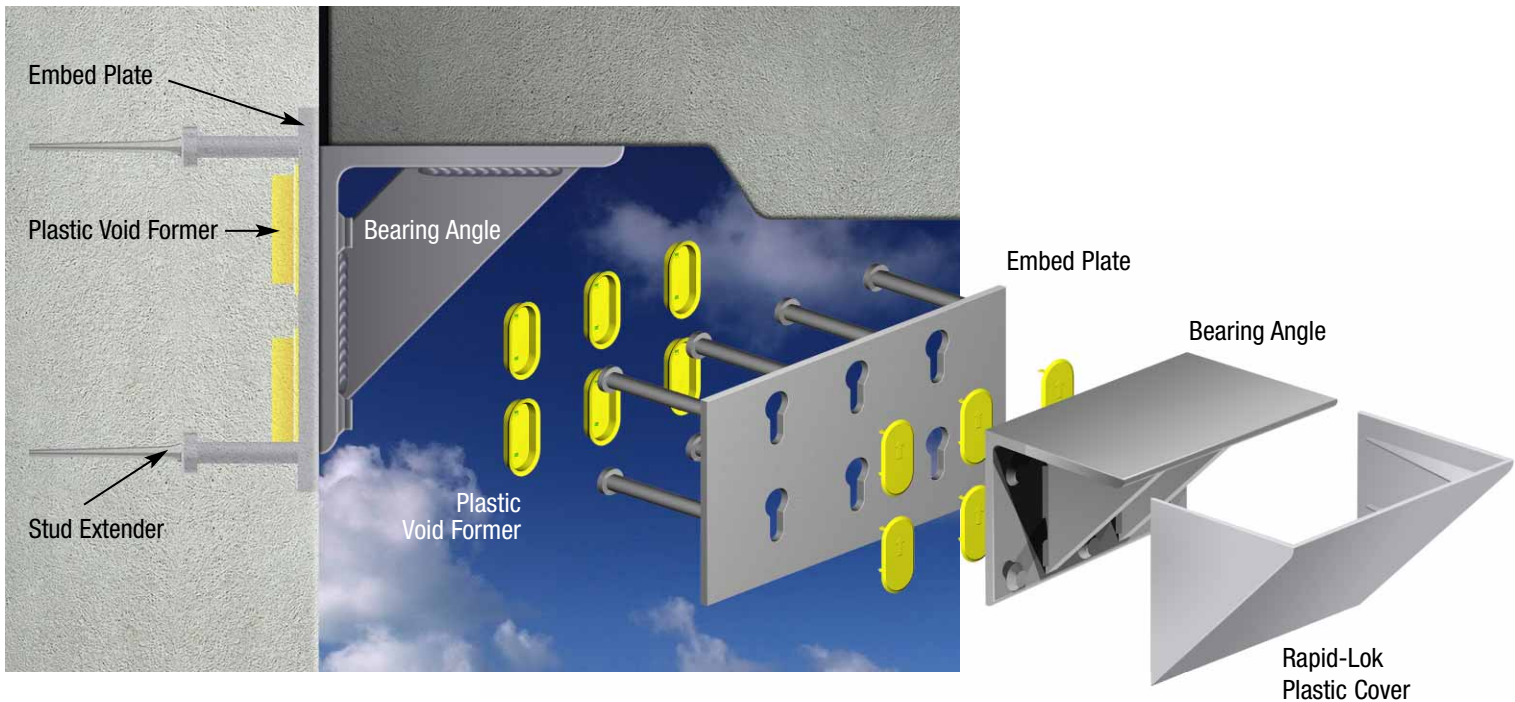

What is the Rapid-Lok System?

Rapid-Lok System is used to eliminate conventional concrete corbels. Rapid-Lok System creates a steel projection in a structural wall, which acts as a shelf, able to carry the weight of a Double Tee, Stair, Beam or other precast elements.

Rapid-Lok System consists of a Bearing Angle, Steel Corbel or Concrete Replicated Bearing Corbel that locks into an Embed Plate cast into a structural wall.

How It Works:

The Embed Plate is cast into the structural wall at the precast plant, with the faceplate flush to the wall face. Once the precast structure is on site, the void formers attached to the face of the Embed Plate that create recesses are removed by the Erector to reveal 'keyholes.'

The Bearing Angle, Concrete Replicated Bearing Corbel's interlocking studs are then engaged into the keyholes of the Embedded Plate, securely locking them in place without requiring a weld. Selection of a Bearing Angle, Concrete Replicated Bearing Corbel is based upon load requirements, fire rating and aesthetic finish desired for the project.

Why is it Better?

Saves time and money:

- Reduces the risk of accidents in the precast plant by not having to position and place the heavy concrete corbels in the process of producing a panel or column
- Forming and casting corbels in a precast panel is both time consuming and requires additional material costs. This is eliminated by using the Rapid-Lok Embed Plate at the precast plant and then engaging the Bearing Angle or Bearing Corbel onsite during erection
- Eliminates the need for onsite welding and weld inspections as the connection to the face plate and angle are secured by interlocking studs

Improves aesthetics:


- Less obtrusive than a larger concrete corbel
- Offers an 'urban industrial' look to the structure if the steel of the Bearing Angle is left exposed
- The Bearing Angle can be covered with a concrete colored Rapid-Lok Plastic Cover
- When encased in concrete, the Bearing Angle recreates the finish and look of a traditional concrete corbel

Design the Rapid-Lok into a Project:

- Identify the live and dead loads of the weight the Rapid-Lok must hold
- Select either the Bearing Angle based on hours of fire rating required
- Select either the Bearing Angle based on aesthetics (exposed vs. encased finish)

The Embed Plate is cast into the structural wall at the precast plant, with the faceplate flush to the wall face.

Features

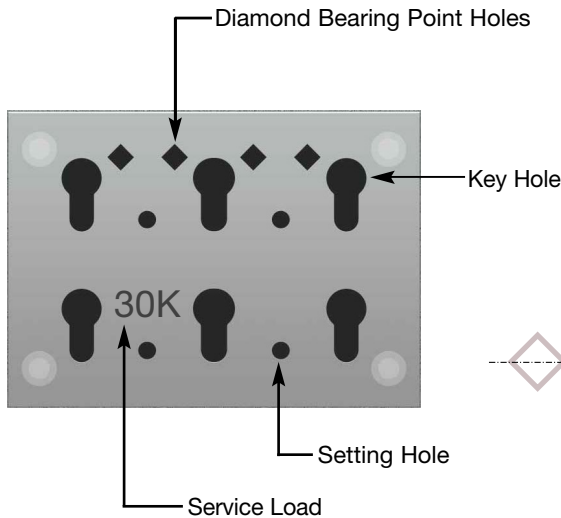

Embed Plate

Selection of the Embed Plate size and configuration is determined by the selection of either Bearing Angle, Concrete Replicated Bearing Corbel.

- Manufactured from ASTM A36 steel, it is a durable long-term solution over using a concrete corbel
- Available in various size configurations to provide a performance range from 30 kip – 40 kip in service load
- Available in either plain or hot dipped galvanized finish

Diamond Holes

Knowing exactly where the "Bearing Point" is located has never been easier. Find the "Diamond Hole," line up the correct elevation to the corners, and the Rapid-Lok is right on! Note that this is a through hole, visible from either side, even after galvanizing.

Setting Holes

Setting Holes aid in the installation process, are 0.562" in diameter and are consistently located for use with templates during production.

Service Load Stamp

The service load of the device is located on the face of the embed plate. This indicates the unit's service load and is to be used only as a convenient indicator of the unit installed after concrete has been placed. Installation and location of the Rapid-Lok may reduce the service load.





Plastic Void Former

Each Void Former is a plastic box which fits into the keyhole and is secured into place with locking stems, eliminating any concrete leakage, even when self consolidating concrete is used. This former creates a voided area, free of concrete behind the Embed Plate and permits the attachment of the Bearing Angle without interference.

Stud Extender

The MB Stud Extender (US PATENT NO. US7065930B2) is designed as an adjustable height support chair for embed/weld plates. The Stud Extender eliminates the tedious, labor-intensive wood forming or risky "wet setting" of embed plates in the top-face of a concrete panel.

- Easy to use
- Saves materials and time
- Eliminates wood framing
- Consistent accuracy
- Screed and finish panels easily

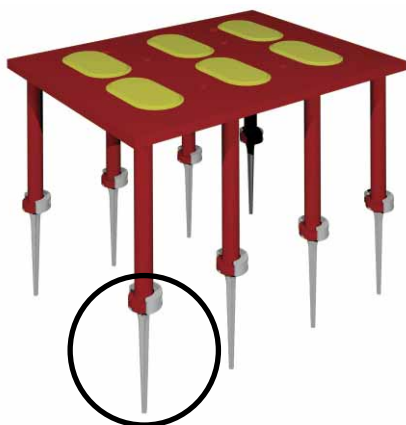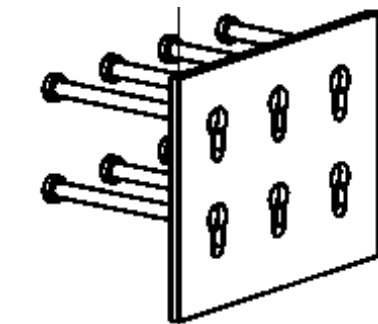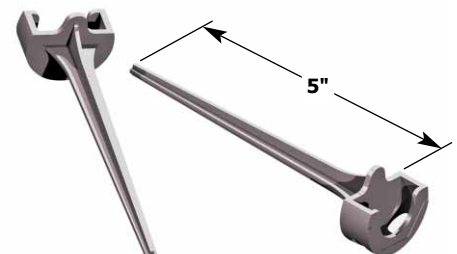



The Bearing Angle



Selection of a Rapid-Lok model is based on load requirements, fire rating and aesthetic finish desired for the project.

The Bearing Angle is used to create a shelf which acts as a traditional corbel replacement. The underside of the angle is left exposed or it is covered with the Rapid-Lok Plastic Cover.

- Available in various sizes to provide a performance range from 30 kip – 40 kip in service load
- All sizes of Bearing Angles provide up to a 1-hour fire rating. The 30 kip provides 2-hour fire rating
- The Rapid-Lok Plastic Cover is available for the 30 kip Bearing Angle models. It fits securely under the gusset of the Bearing Angle units to completely conceal all three of its open sides. Due to it replicating the color of concrete, it blends into the surrounding structure

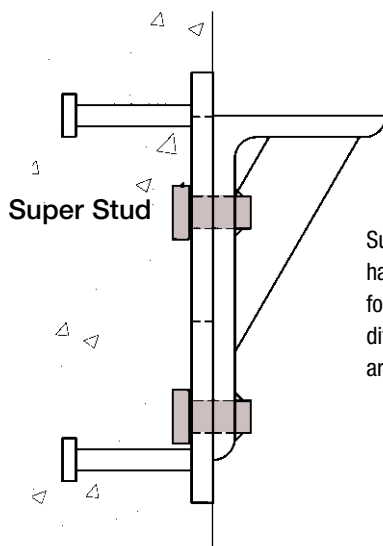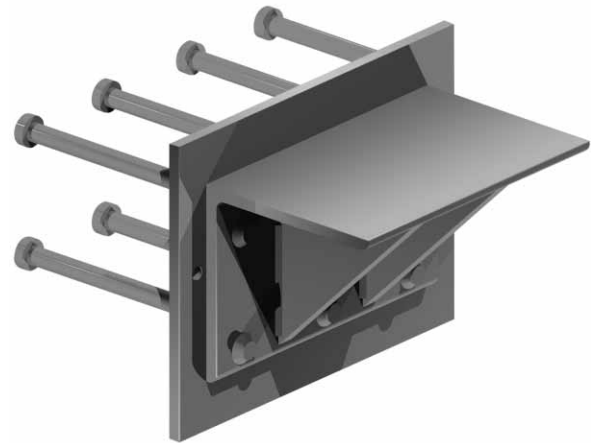


Super studs attached to the Bearing Angle have been "cold tested," configured and sized for optimum performance in all weather conditions, ensuring the load bearing capacities are met.

Rapid-Lok Plastic Cover



Rapid-Lok Plastic Cover will completely conceal all three open sides of the Rapid-Lok Bearing Angle.


Fits 30 Kip Rapid-Lok

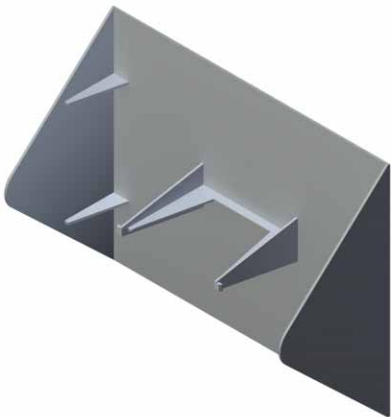

Rapid-Lok Plastic Cover will completely conceal all three open sides of the Rapid-Lok Bearing Angle, like that of a concrete corbel or concrete ledge in a conventional precast or cast-in-place scenario. Just simply snap the cover into place, fastening it to the gussets of the existing Rapid-Lok Bearing Angle Assembly.

A simple but effective concrete colored plastic cover that attaches to the existing angles of the 30 kip (MBRLC30) Rapid-Lok Bearing Angle Assembly. The Rapid-Lok Plastic Cover eliminates all the safety issues associated with installing a concrete corbel to a precast panel by reducing the weight and ergonomic concerns of hanging a large piece of concrete. The Rapid-Lok Plastic Cover was thoroughly tested to ensure that it will perform exceptionally well, even in extreme conditions. It holds its shape and resists impact damage at temperatures approaching zero and exceeding 125°F. Although it normally remains in place once installed, the cover can be detached and reattached dozens of times if needed without deforming.

Item Number	Description
MBRLC30	Plastic Cover for 30 kip Rapid-Lok

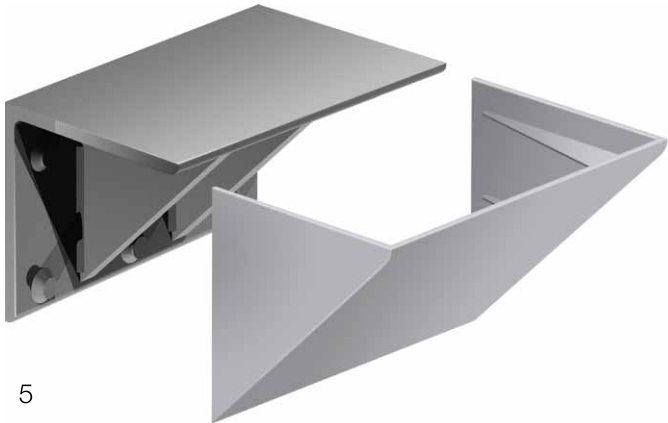


Concrete Replicated Bearing Corbel



Concrete Replicated Bearing Corbel is functionally identical to the Bearing Angle but has additional studs to form a frame, allowing the casting of concrete around the corbel. The underside angle is then encased in concrete to create a traditional concrete corbel finish.

- Available in various sizes to a performance range from 30 kip – 40 kip in service load
- The 30 kip and 40 kip units provide a 2-hour fire rating.

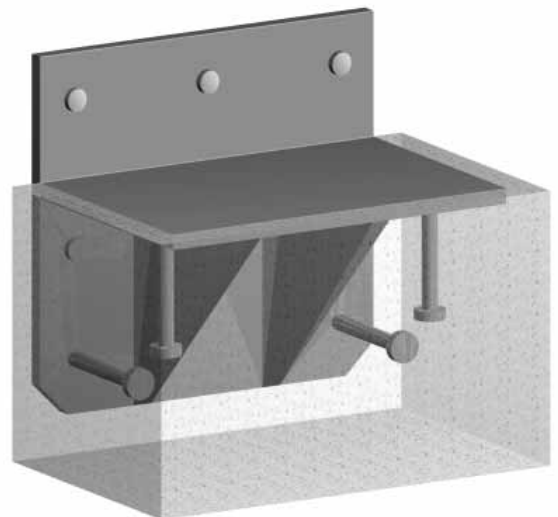



30 Kip Service Load

	Finish		Description	Vertical Service Load (kips)	Horizontal Service Load (kips)	Fire Rating Hours	Embed Plate Dim.		Bearing Angle & Corbel Dim.			Bearing Point		Embed Plate Stud Qty & Size	
	Plain Finish	Hot Dipped Galvanized					A (inches)	B (inches)	C (inches)	D (inches)	E (inches)	F (inches)	e (inches)	# of Studs/ Embed Plate	Stud Size (inches)
Rapid-Lok Model	Item Number	Item Number													
30 kip 8"	30RLA	30RLAG	30k 8" Bearing Angle	30 kip	18 kip	2 Hour			8"	14"	8"	2"	5"	8	3/4" x 8"
	30RLP12	30RLP12G	30k Embed Plate				15.5"	12"							
30 kip Thin Wall	30RLA	30RLAG	30k 8" Bearing Angle	30 kip	18 kip	2 Hour			8"	14"	8"	2"	5"	8	3/4" x 5"
	30RLP12TW	30RLP12TWG	30k Thin Wall Embed Plate				15.5"	12"							
30 kip 8" Concrete Corbel	30RLAS	30RLASG	30k 8" Bearing Angle w/studs	30 kip	18 kip	2 Hour			8"	14"	8"	2"	5"	8	3/4" x 8"
	30RLP12	30RLP12G	30k Embed Plate				15.5"	12"							
30 kip 8" Thin Wall Concrete Corbel	30RLAS	30RLASG	30k 8" Bearing Angle w/studs	30 kip	18 kip	2 Hour			8"	14"	8"	2"	5"	8	3/4" x 5"
	30RLP12TW	30RLP12TWG	30k Thin Wall Embed Plate				15.5"	12"							

NOTE: Full vertical and horizontal service loads cannot be applied simultaneously. The following interaction equation should be used for controlling service load combinations.


- 1 Maximum in-plane eccentricity for load application is 2-3/8" from centerline
- 2 Products are fire tested per ASTM E119
- 3 All Hot Dipped Galvanized components are hot dip galvanized per ASTM A153
- 4 30 kip concrete corbel with 3 hour fire rating available on special order.

$$\left(\frac{\text{Horizontal Service Load}}{\text{Published Horizontal Service Load}} \right)^{5/3} + \left(\frac{\text{Vertical Service Load}}{\text{Published Vertical Service Load}} \right)^{5/3} \leq 1.0$$

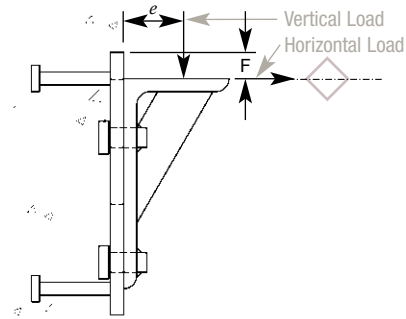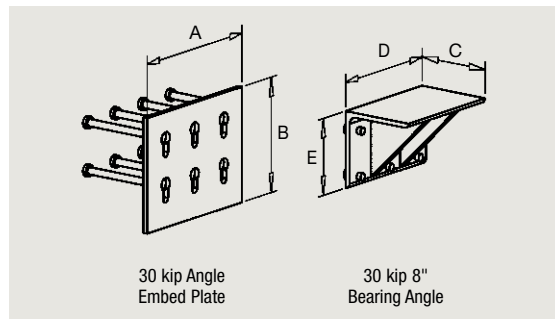


Stud Location

(Units in Inches)

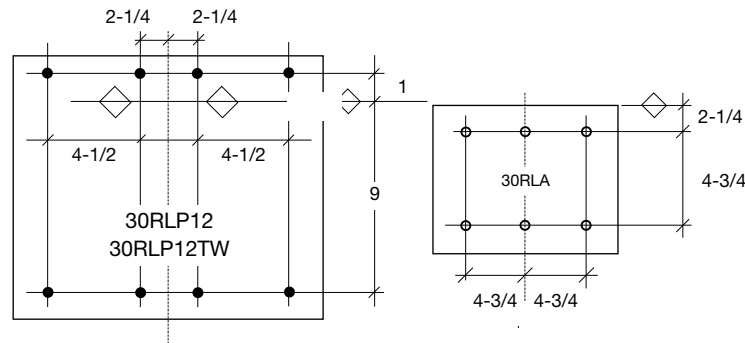

Minimum Edge Distance

30 Kip Service Load					
Rapid-Lok Model	Item Number	Edge Distances (Inches)			
		C _{a1}	C _{a2}	C _{a3}	C _{a4}
30 kip 8"	30RLP12	12.25	10	12.25	18
30 kip Thin Wall	30RLP12TW	12.25	10	12.25	18
30 kip 8" Concrete Corbel	30RLP12	12.25	10	12.25	18
30 kip 8" Thin Wall Concrete Corbel	30RLP12TW	12.25	10	12.25	18

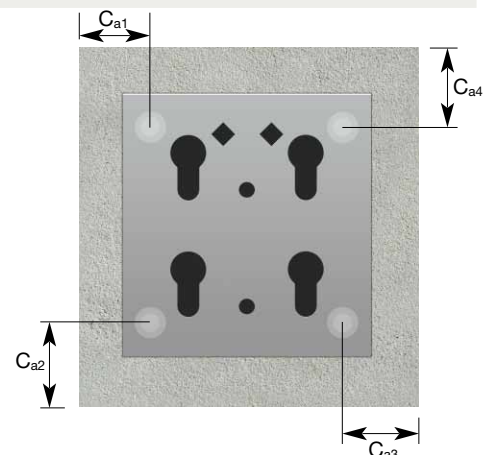



40 Kip Service Load

Rapid-Lok Model	Finish		Description	Vertical Service Load (kips)	Horizontal Service Load (kips)	Fire Rating Hours	Embed Plate Dim.		Bearing Angle & Corbel Dim.		Bearing Point		Embed Plate Stud Qty & Size	
	Plain Finish	Hot Dipped Galvanized					A (inches)	B (inches)	C (inches)	D (inches)	E (inches)	F (inches)	e (inches)	# of Studs/Embed Plate
40 kip 8-1/2"	40RLA	40RLAG	40k 8-1/2" Bearing Angle	40 kip	26 kip	1 Hour			8.5"	12"	11.5"	5.75"	5"	
	40RLP	40RLPG	40k Embed Plate				15.5"	13.25"						8
40 kip 8-1/2" Concrete Corbel	40RLAS	40RLASG	40k 8-1/2" Bearing Angle w/studs	40 kip	26 kip	2 Hour			8.5"	12"	11.5"	5.75"	5"	
	40RLP	40RLPG	40k Embed Plate				15.5"	13.25"						8

NOTE: Full vertical and horizontal service loads cannot be applied simultaneously. The following interaction equation should be used for controlling service load combinations.


- 1 Maximum in-plane eccentricity for load application is 2-3/8" from centerline
- 2 Products are fire tested per ASTM E119
- 3 All Hot Dipped Galvanized components are hot dip galvanized per ASTM A153

$$\left(\frac{\text{Horizontal Service Load}}{\text{Published Horizontal Service Load}} \right)^{5/3} + \left(\frac{\text{Vertical Service Load}}{\text{Published Vertical Service Load}} \right)^{5/3} \leq 1.0$$

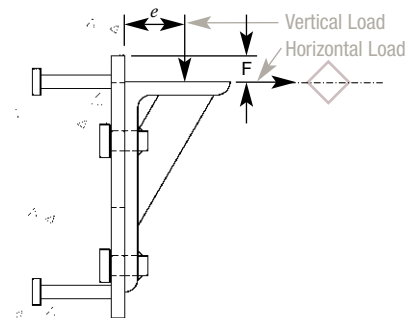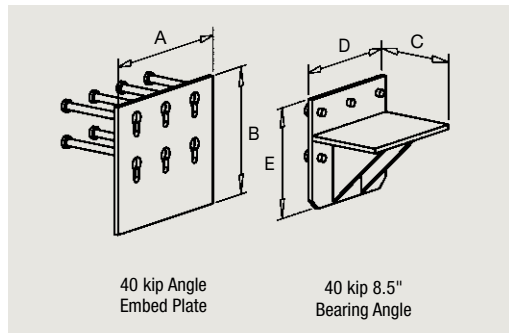


Stud Location


(Units in Inches)

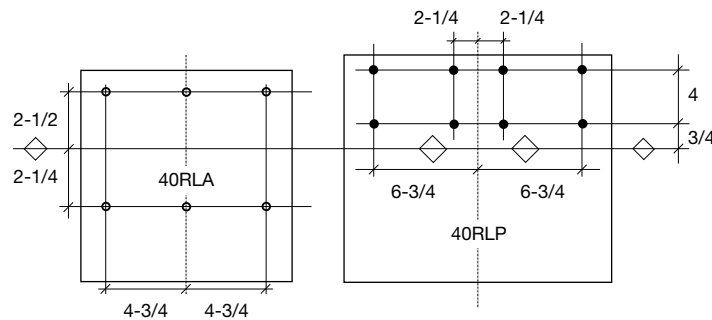

Minimum Edge Distance

40 Kip Service Load					
Rapid-Lok Model	Item Number	Edge Distances (Inches)			
		C _{a1}	C _{a2}	C _{a3}	C _{a4}
40 kip 8-1/2"	40RLP	15.25	17.75	15.25	12.25
40 kip 8-1/2" Concrete Corbel	40RLP	15.25	17.75	15.25	12.25

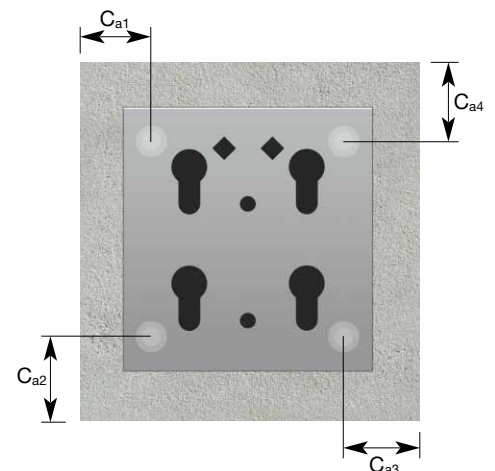

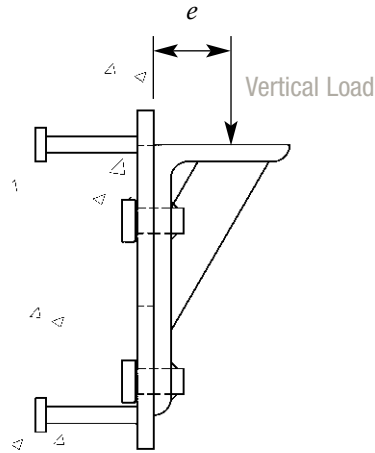

Ultimate Assembly Capacities as Tested in Concrete

Raw Material Information

U-stiffeners, Embedment Plates and

Angles $F_y=36,000$ psi

Triangular Stiffeners $F_y=50,000$ psi

Concrete Embedment Studs $f_{ut}=65,000$ psi

Interconnecting Studs $f_{ut}=70,000$ psi

MB Item Number	Rapid-Lok Assembly Type	Vertical Load Eccentricity "e"	Ultimate Load
30RLA 30RLP12	30 kip 8"	5"	90 kip
30RLA 30RLP12TW	30 kip Thin Wall	5"	90 kip
40RLA 40RLP	40 kip 8-1/2"	5"	120 kip

This data is for designers using ultimate strength design per PCI, 8th edition or ACI 318. Meadow Burke does not recommend using or accept liability for Service Loads applied in excess of those listed as Service Loads in this document.

Note: Ultimate Loads are based on 5,000 psi concrete.

Note: Proper installation of the Rapid-Lok Bearing Angle and/or Corbel is indicated by the bearing surface being properly positioned at the center/corners of the Diamond Holes. No load is to be applied to the Rapid-Lok assembly until these units are fully and properly engaged.

North American Locations

California

3611 E La Palma Ave
Anaheim CA 92806
(800) 804-6565

Iowa

1000 Technology Drive
Boone IA 50036
(800) 232-1748

Pennsylvania

565 Oak Ridge Road
Hazle Township PA 18202
(800) 550-0060

Florida Corporate
6467 S Falkenburg Road
Riverview FL 33578
(800) 282-7213

New Jersey
526 US Route 46
Teterboro NJ 07608
(800) 207-7778

Texas
7000 Will Rogers Blvd
Fort Worth TX 76140
(800) 993-9641

Georgia
3080 N Lanier Parkway
Decatur GA 30034
(800) 241-5662

Oregon
155 SE Hazel Dell Way
Canby OR 97013
(888) 232-9991

Texas
6500 N Interstate 35
San Antonio TX 78218
(800) 323-6896

Contact Information

Customer Service

(877) 518-7665

Email

info@leviat.us

Engineering Support

(813) 212-5866

Web

www.leviat.com

Leviat.com

For information on certified management systems and standards see www.meadowburke.com | www.halfen.com | www.thermomass.com

Notes regarding this catalogue

© Protected by copyright. The construction applications and details provided in this publication are indicative only. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Whilst every care has been exercised in the preparation of this publication to ensure that any advice, recommendations or information is accurate, no liability or responsibility of any kind is accepted by Leviat for inaccuracies or printing errors. Technical and design changes are reserved. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.



01051LV-B001-2110FC

Imagine. Model. Make.

Leviat.com